Assembly Instructions

Item#D-GZ399PST-H

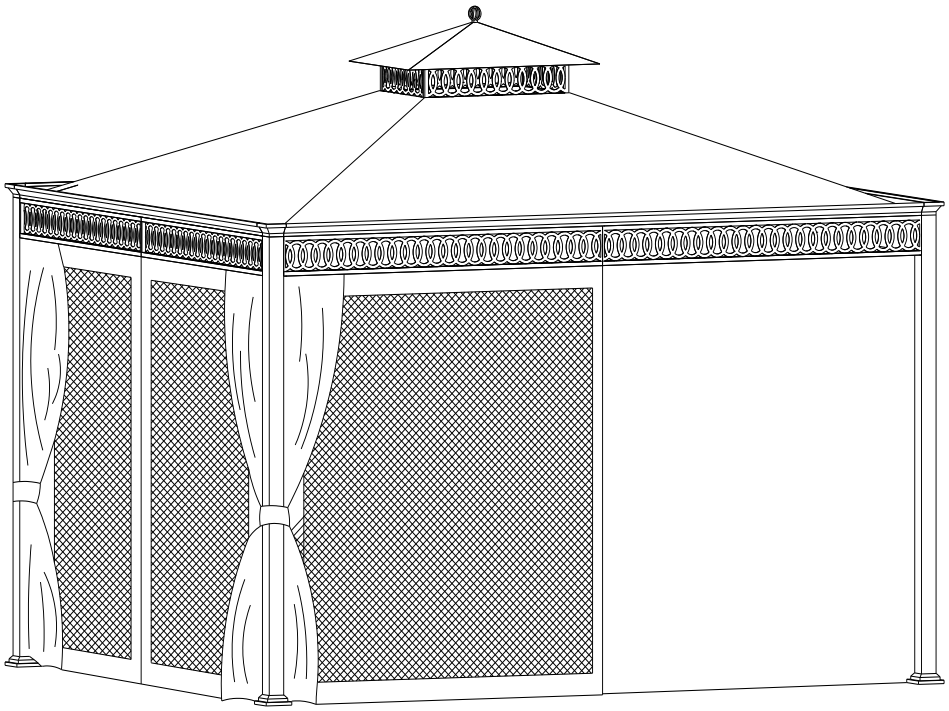

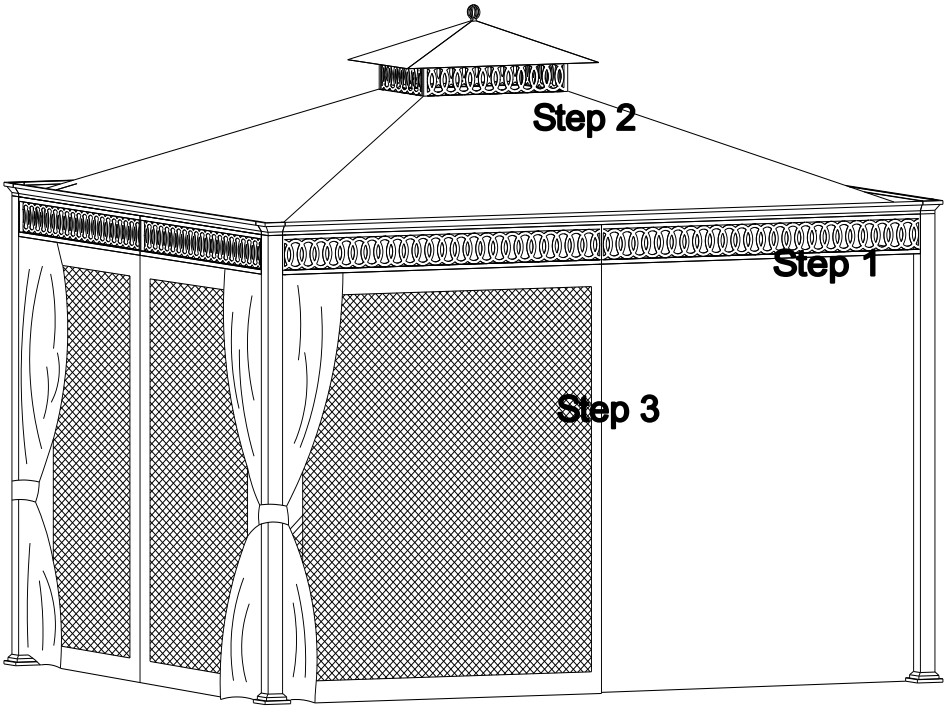

Parts List

Post	A	4	
Base protector	B	4	
Post base	C	4	
Long panel (1)	D1	2	
Long panel (2)	D2	2	
Short panel (1)	E1	2	
Short panel (2)	E2	2	
Slanting bar	F	4	
Short mid top bar	G1	2	
Long mid top bar	G2	2	
Slanting bar Connector	H	4	
Mid top bar connector	I	4	
Conner decor block	J	4	
Small top connector	K	1	
Small top bar (1)	L1	2	
Small top bar (2)	L2	2	
Pothook	M	1	
Long panel of top frame	N1	2	
Small panel of top frame	N2	2	

Long netting bar	O1	4	
Short netting bar	O2	4	
Top Finial	P	1	
Small canopy	Q	1	
Large canopy	R	1	
Wall	S	1	
Mosquito netting	T	1	

Hardware Pack 1

AA	M6*15 bolt	32PCS	
BB	M6 flat washer	64 PCS	
CC	M6*15 bolt	16 PCS	
DD	M6*25 bolt	16 PCS	
W	M6 wrench	1 PC	

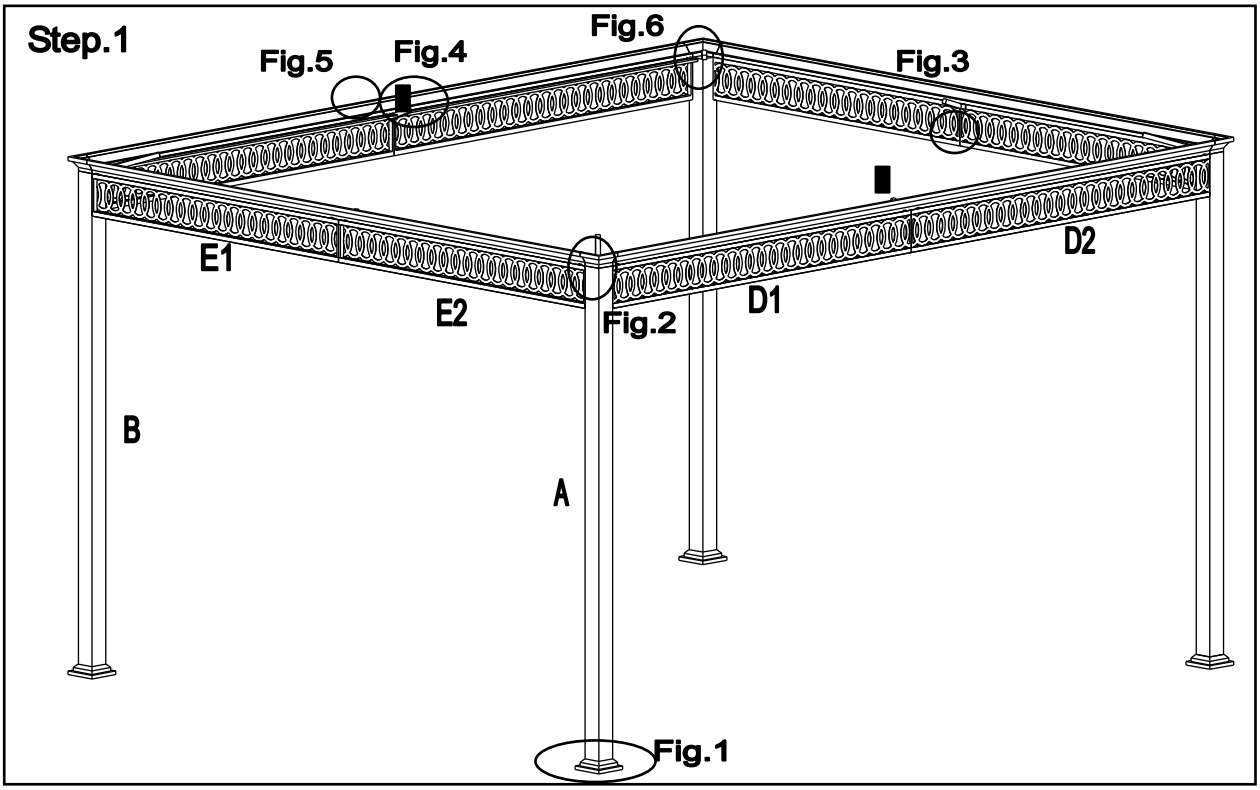



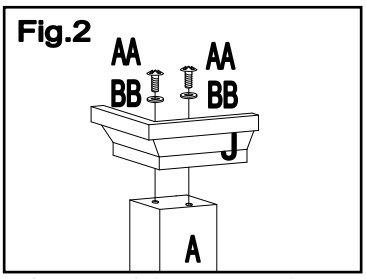

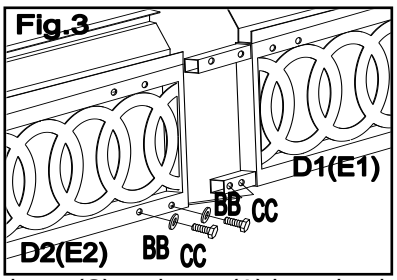

Fig.1: Fit the Base protector (B) onto the Post (A), connect the Post base (C) and post (A) by using bolt (AA) and flat washer (BB).

Fig.2: Fix the Conner decor block (J) onto the top of the post (A) by using bolt (AA) and flat washer (BB).

Fig.3: Insert the Long panel 1 (D1) into Long panel 2 (D2), fix them by using bolt (CC) and flat washer (BB). Connect the Short panels (E1 & E2) in the same way. **(Please note the screw position.)**



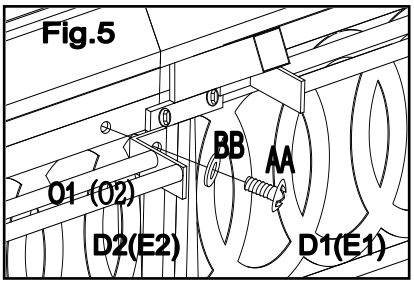



Fig.4: Fix the Mid top bar connector (I) on the middle of the panels (D1 & D2 / E1 & E2) by bolt (CC) and washer (BB).

Fig.5: Fix the long netting bar (O1) to long panels & short netting bar (O2) to short panels by using bolt (AA) and flat washer (BB).

Fig.6: Fix the assembled panels to the post (A) by using bolt (DD) and flat washer (BB).

Hardware Pack 2

AA	M6*15 bolt	4PCS	
BB	M6 flat washer	28 PCS	
CC	M6*15 bolt	16 PCS	
DD	M6*25 bolt	8 PCS	

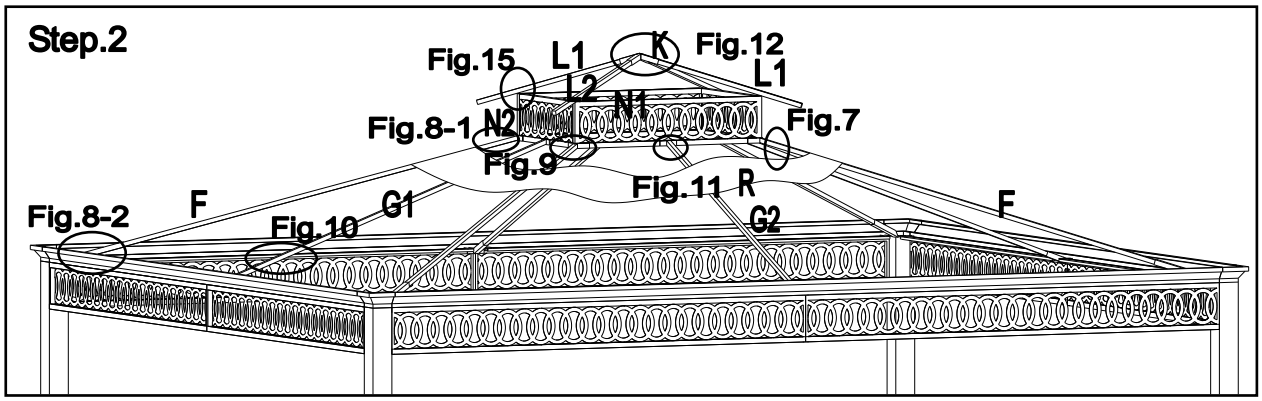

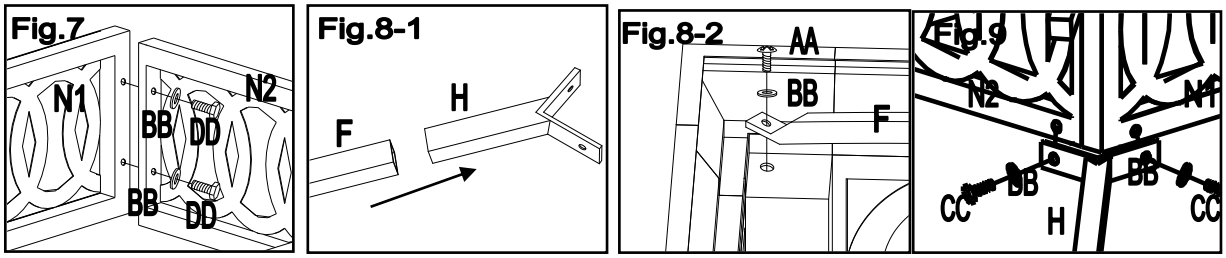

Fig.7: Fix Small panel of top frame (N2) to Long panel of top frame (N1) by using bolt (DD) and washer (BB).

Fig.8-1: Insert Slanting bar (F) to Slanting bar Connector (H).

Fig.8-2: Fix Slanting bar (F) to the top of Post (A) by using bolt (AA) and washer (BB).

Fig.9: Attach Slanting bar Connector (H) to the corner of the top frame (N1 & N2) by using bolt (CC) and washer (BB).

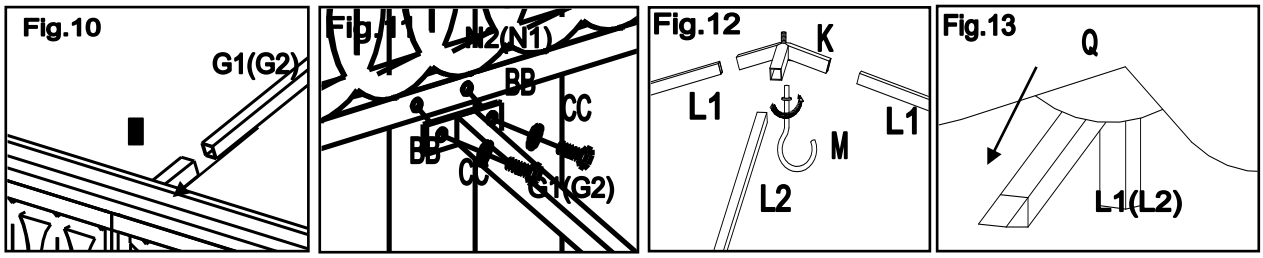

Fig.10: Insert Long mid top bar (G1) and Short mid top bar (G2) into the Mid top bar connector (I).

Fig.11: Fix long mid top bar (G1) to short panel of top frame (N2) and short mid top bar (G2) to long panel of top frame (N1) by using bolt (CC) and washer (BB). Put the Large canopy (R) on the big top; do not spread it.

Fig.12: Insert Small top bar (L1 & L2) to Small top connector (K), screw the Pothook (M) to Small top connector (K).

Fig.13: Fit assembled small top to the corner of top frame, attach the netting of small canopy on inside of top frame.

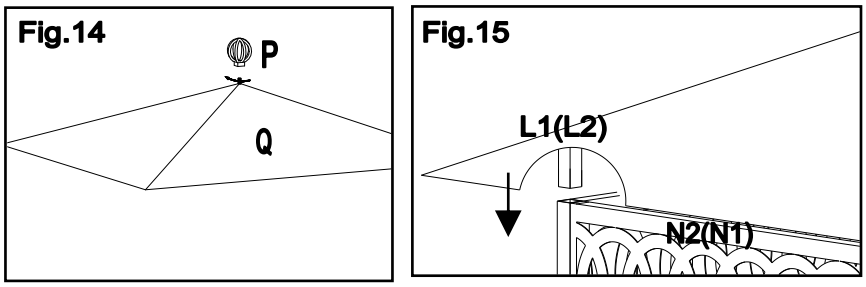

Fig.14: Screw the Top Finial (P) to Small top connector (K).

Fig.15: Fit assembled small top to the corner of top frame, attach the netting of small canopy on inside of top frame.

Hardware Pack 3

FF	Pastic Ring	104 PCS	
EE	Φ8*180 peg	16 PCS	

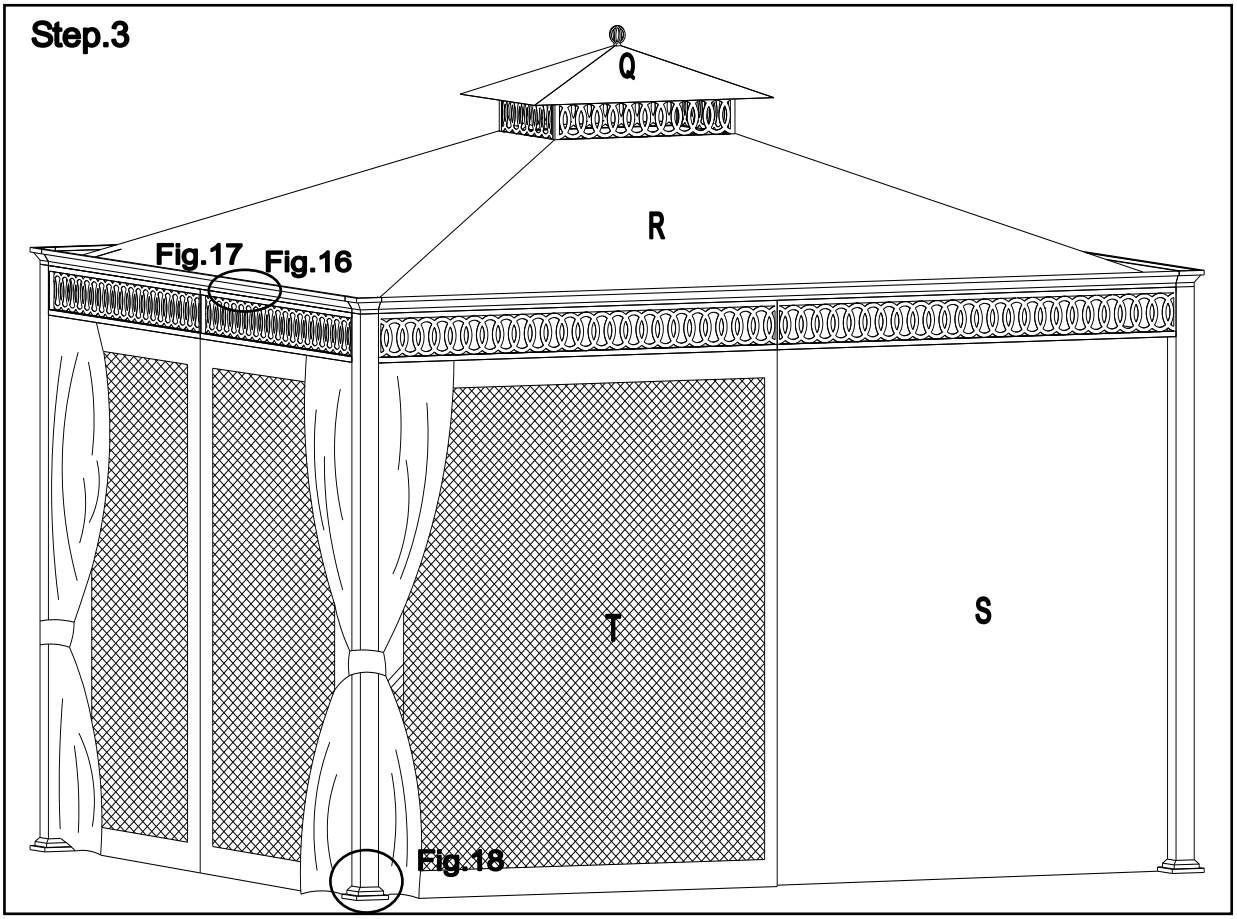

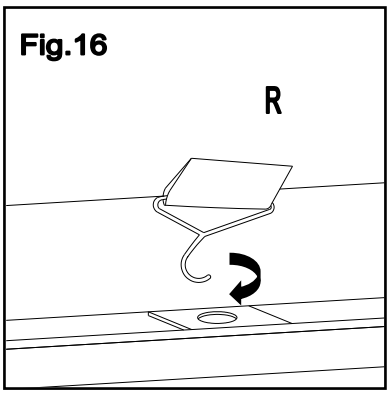

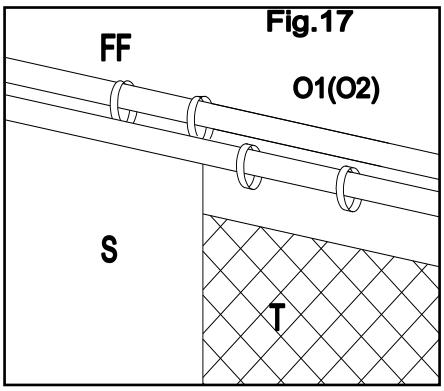

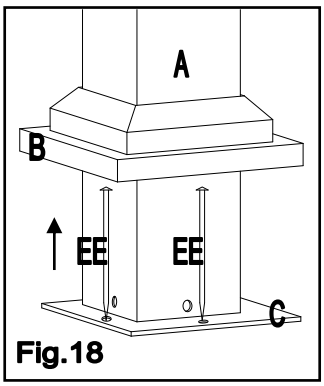

Fig.16: Spread the Large canopy (R), hang the pothooks of the large canopy into the holes on the panels.
Fig.17: Hang Mosquito netting (T) on the inside netting bar (O1 & O2) by using the Plastic ring (FF). Wall (S) on the outside.
Fig.18: Fix the assembled gazebo with Peg (EE).

IMPORTANT:

1. Keep all children and pets away from assembly area. Children and pets should be supervised when they are in the area of gazebo construction.
2. The area for assembly should not be less than 6 feet from any obstruction such as fence, garage, house, overhanging branches, laundry line or electrical wires.
3. This unit is heavy. Do not assemble this item alone. Six people are recommended for safe assembly.
4. Some parts may contain sharp edges. Wear protective gloves if necessary during assembly.
5. When assembling and using this product, basic safety precautions should always be followed to reduce the risk of personal injury and damage to equipment. Please read all instructions before assembly and use.
6. For outdoor use only. Install on level ground. Stakes are provided to secure the gazebo in grass ground. If you wish to secure the gazebo to a wood deck or concrete surface, you will need to purchase fasteners appropriate for these surfaces. These are readily available at your local hardware store or home center.
7. Check all bolts for tightness before and during usage.
8. Please check your state and local regulations prior to purchasing. Some jurisdictions may require permits for, or otherwise regulate, installation and use.
9. While this gazebo is manufactured to withstand gale force winds utilizing only the supplied ground stakes, in areas subject to frequent severe weather, securing the gazebo to a deck, concrete patio or footings should be considered.

Limited Warranty:

This limited warranty is extended to the original purchaser and applies to defects in materials and workmanship of your item provided the item is maintained with care and used only for personal, residential purposes. The item is warranted to be free from defects in material or workmanship for a period of one (1) year. We don't reimburse for transportation or delivery costs, or compensate the individual or any outside party for assembling or disassembling the product.

Exclusions:

Items used for commercial, contract, or other non-residential purposes, or items damaged due to acts of nature, vandalism, misuse, or improper assembly are not covered. Corrosion or rusting of hardware is not covered. Proof of purchase (dated register receipt) is required for warranty claims. Warranty is to the original purchaser and is non-transferable. Any replacement of warranted items will be in the original style and color, or a similar style and color if the original is unavailable or has been discontinued. As some states do not allow exclusions or limitations on an implied warranty, the above exclusions and limitations may not apply. This warranty gives you specific rights, and you may also have other rights, which vary from state to state.

Maintenance:

Our iron/steel components for garden accessories and patio items are coated with rust inhibiting paint that protects it from rusting. However, due to the nature of iron, surface oxidation (rusting) will occur once these protective coatings are scratched. This is a natural process and is not a defect! To minimize this condition, we recommend care when assembling & handling the product to prevent scratching the paint. Should any scratching or damage occur, we recommend immediate touch-up with rust inhibiting paint. Surface rust can also be easily removed with a very light application of common cooking oil. If surface oxidation (rusting) occurs and if no measure is taken to prevent this, the oxidation may start dripping on to deck or patio and cause damaging stains, which may be difficult to remove. This can be prevented if measure is taken to keep the product from oxidizing.

IMPORTANT

Please take time to read these instructions thoroughly and follow each step carefully for safe and easy operation. Keep this manual for future reference.

For technical assistance on assembly or replacement parts, call Sunjoy Industries at 1-866-578-6569 from 8:30AM to 5:30PM EST, or email us at customer.care@sunjoygroup.com, or visit www.sunjoyonline.com for assistance.

Made in China